
Contact washer
NFE 25-511 - medium form "M"

For Screws of	d min.-max.	D min.-max.	s min.-max.	No. of knurls	Weight (785kg/dm ²) kg/1000 pcs.	b min. max.	Packaging
M 3.0	3.10-3.35	7.71-8.29	0.57-0.63	28	0.180	0.80-1.00	1.000
M 4.0	4.10-4.40	9.71-10.29	0.86-0.94	32	0.430	1.15-1.40	1.000
M 5.0	5.10-5.40	11.65-12.35	1.06-1.14	36	0.720	1.45-1.80	1.000
M 6.0	6.10-6.40	13.65-14.35	1.26-1.34	45	1.150	1.75-2.10	1.000
M 8.0	8.20-8.56	17.65-18.35	1.36-1.44	45	2.000	1.90-2.35	1.000
M 10.0	10.20-10.56	21.58-22.42	1.55-1.65	45	3.600	2.25-2.75	1.000
M 12.0	12.40-12.83	26.58-27.42	1.75-1.85	45	6.010	2.60-3.10	500
M 14.0	14.40-14.83	29.58-30.42	2.34-2.46	45	9.700	3.20-3.70	250
M 16.0	16.40-16.83	31.50-32.50	2.74-2.86	60	12.10	3.60-4.10	250
M 20.0	20.50-21.02	39.50-40.50	3.14-3.26	60	22.10	4.30-4.90	100

NFE 25-511 - large form "B"

M 3.0	on inquiry						
M 4.0	4.10-4.40	13.65-14.35	0.96-1.04	32	1.102	1.40-1.80	1.000
M 5.0	5.10-5.40	15.65-16.35	1.16-1.24	36	1.568	1.70-2.10	1.000
M 6.0	6.10-6.40	17.65-18.35	1.36-1.44	45	2.466	2.10-2.50	1.000
M 8.0	8.20-8.56	21.58-22.42	1.55-1.65	45	3.760	2.20-2.70	1.000
M 10.0	10.20-10.56	26.58-27.42	1.75-1.85	45	6.938	2.60-3.10	1.000
M 12.0	12.40-12.83	31.50-32.50	1.95-2.05	45	10.694	3.10-3.60	500

NFE 25-511 - small form "S" (also form "E")


M 3.0	3.10-3.35	5.76-6.24	0.47-0.53	28	0.070	0.70-0.90	1.000
M 4.0	4.10-4.40	7.71-8.29	0.77-0.83	32	0.200	1.00-1.20	1.000
M 5.0	5.10-5.40	9.71-10.29	0.96-1.04	36	0.400	1.25-1.50	1.000
M 6.0	6.10-6.40	11.65-12.35	1.16-1.24	45	0.707	1.55-1.85	1.000
M 8.0	8.20-8.56	15.65-16.35	1.36-1.44	45	1.500	1.80-2.20	1.000
M 10.0	10.20-10.56	19.58-20.42	1.55-1.65	45	2.640	2.10-2.60	1.000
M 12.0	12.40-12.83	23.58-24.42	1.75-1.85	45	4.350	2.40-2.90	500

SN 70093 - toothed form "K"

M 3.0	3.10-3.35	5.80-6.20	0.57-0.63	28	0,087	0.80-0.95	1.000
M 4.0	4.10-4.40	7.80-8.20	0.77-0.83	32	0.200	1.00-1.15	1.000
M 5.0	5.10-5.40	9.80-10.20	0.97-1.03	36	0.410	1.25-1.50	1.000
M 6.0	6.10-6.40	11.80-12.20	1.16-1.24	45	0.680	1.50-1.80	1.000
M 8.0	8.20-8.56	15.80-16.20	1.36-1.44	45	1.500	1.95-2.40	1.000
M 10.0	10.20-10.56	19.75-20.25	1.56-1.64	45	2.680	2.15-2.60	1.000
M 12.0	12.40-12.83	23.75-24.25	1.56-1.64	45	3.850	2.15-2.60	500
M 14.0	14.40-14.83	23.75-24.25	1.56-1.64	60	3.210	2.05-2.50	500
M 16.0	16.40-16.80	31.70-32.30	2.44-2.56	60	10.900	3.50-3.95	200
M 20.0	20.50-21.00	39.70-40.30	2.94-3.06	60	21.300	4.20-4.65	100

Finishings: zink-flake coating
other coatings on inquiry

technical conditions of delivery: NFE 25-511

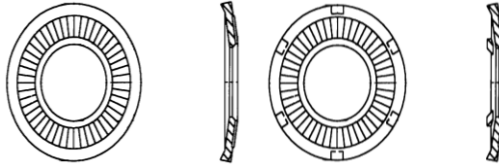

Contact washer

NFE 25-511 - medium form "M"

For Screws of	d min.-max.	D min.-max.	s min.-max.	No. of knurls	Weight (785kg/dm ²) kg/1000 pcs.	b min. max.	Packaging
M 3.0	3.10-3.35	7.71-8.29	0.57-0.63	28	0.180	0.80-1.00	1.000
M 4.0	4.10-4.40	9.71-10.29	0.86-0.94	32	0.430	1.15-1.40	1.000
M 5.0	5.10-5.40	11.65-12.35	1.06-1.14	36	0.720	1.45-1.80	1.000
M 6.0	6.10-6.40	13.65-14.35	1.26-1.34	45	1.150	1.75-2.10	1.000
M 8.0	8.20-8.56	17.65-18.35	1.36-1.44	45	2.000	1.90-2.35	1.000
M 10.0	10.20-10.56	21.58-22.42	1.55-1.65	45	3.600	2.25-2.75	1.000
M 12.0	12.40-12.83	26.58-27.42	1.75-1.85	45	6.010	2.60-3.10	500
M 14.0	14.40-14.83	29.58-30.42	2.34-2.46	45	9.700	3.20-3.70	250
M 16.0	16.40-16.83	31.50-32.50	2.74-2.86	60	12.10	3.60-4.10	250
M 20.0	20.50-21.02	39.50-40.50	3.14-3.26	60	22.10	4.30-4.90	100

NFE 25-511- large form "B"

M 3.0	on inquiry						
M 4.0	4.10-4.40	13.65-14.35	0.96-1.04	32	1.102	1.40-1.80	1.000
M 5.0	5.10-5.40	15.65-16.35	1.16-1.24	36	1.568	1.70-2.10	1.000
M 6.0	6.10-6.40	17.65-18.35	1.36-1.44	45	2.466	2.10-2.50	1.000
M 8.0	8.20-8.56	21.58-22.42	1.55-1.65	45	3.760	2.20-2.70	1.000
M 10.0	10.20-10.56	26.58-27.42	1.75-1.85	45	6.938	2.60-3.10	1.000
M 12.0	12.40-12.83	31.50-32.50	1.95-2.05	45	10.694	3.10-3.60	500

NFE 25-511 - small form "S" (also form "E")

M 3.0	3.10-3.35	5.76-6.24	0.47-0.53	28	0.070	0.70-0.90	1.000
M 4.0	4.10-4.40	7.71-8.29	0.77-0.83	32	0.200	1.00-1.20	1.000
M 5.0	5.10-5.40	9.71-10.29	0.96-1.04	36	0.400	1.25-1.50	1.000
M 6.0	6.10-6.40	11.65-12.35	1.16-1.24	45	0.707	1.55-1.85	1.000
M 8.0	8.20-8.56	15.65-16.35	1.36-1.44	45	1.500	1.80-2.20	1.000
M 10.0	10.20-10.56	19.58-20.42	1.55-1.65	45	2.640	2.10-2.60	1.000
M 12.0	12.40-12.83	23.58-24.42	1.75-1.85	45	4.350	2.40-2.90	500

SN 70093 - toothed form "K"

M 3.0	3.10-3.35	5.80-6.20	0.57-0.63	32	0,087	0.80-0.95	1.000
M 4.0	4.10-4.40	7.80-8.20	0.77-0.83	36	0.200	1.00-1.15	1.000
M 5.0	5.10-5.40	9.80-10.20	0.97-1.03	45	0.410	1.25-1.50	1.000
M 6.0	6.10-6.40	11.80-12.20	1.16-1.24	45	0.680	1.50-1.80	1.000
M 8.0	8.20-8.56	15.80-16.20	1.36-1.44	45	1.500	1.95-2.40	1.000
M 10.0	10.20-10.56	19.75-20.25	1.56-1.64	45	2.680	2.15-2.60	1.000
M 12.0	12.40-12.83	23.75-24.25	1.56-1.64	45	3.850	2.15-2.60	500
M 14.0	14.40-14.83	23.75-24.25	1.56-1.64	60	3.210	2.05-2.50	500
M 16.0	16.40-16.80	31.70-32.30	2.44-2.56	60	10.900	3.50-3.95	200
M 20.0	20.50-21.00	39.70-40.30	2.94-3.06	60	21.300	4.20-4.65	100

Raw material: stainless and acid-protected steel